


Image not found or type unknown



## Technical information

**Productnumber : 8608101043**

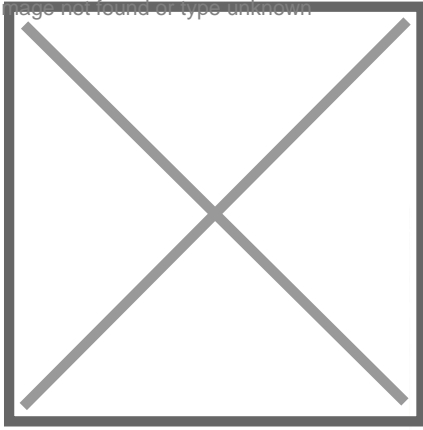

### Product description

Professional quality aluminum ramp 250 cm, set of 2 pieces. Very suitable for transporting construction machinery, agricultural vehicles, carriages, golf carts. Easy to move due to the light weight and the anti-slip profile prevents slipping. Load capacity per set; 1850 kg with an axle distance of 100 cm. Suitable for a ramp height of 39 to 69 cm.

This ramp is supplied as standard with connection A and a flat floor 1, see detail photos. It is optionally possible to adjust this to your liking, please contact us for the possibilities or indicate your preference during the ordering process.

### Specifications

Article arrangement: New  
Version: aluminium 250 cm (pair)  
Top: driving area of anti slip profile  
Width (mm): 400  
Loading capacity (kg): 1850  
Type number: AOS-400  
Min Height (mm): 390  
EAN Code (Gtin) 8719424024579

Type: access ramp straight  
Material: aluminium  
Length (mm): 2500  
Height (mm): 70  
Weight (kg) 23  
Batch (items): 2  
Max Height (mm): 690

Scan the QR code for more information



**KRUIZINGA.NL®**  
Opslag- en transportmiddelen

**KRUIZINGA.DE®**  
Lager- und Transportmittel

**KRUIZINGA.FR®**  
Stockage et ressources de transport

**KRUIZINGA.COM®**  
Material handling equipment