


Image not found or type unknown

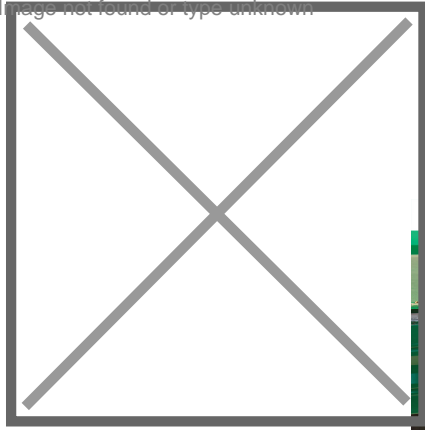

Technical information

Productnumber : 8615011030

Product description

High quality ramp suitable for loading medium to heavy vehicles such as construction machines, garden machines or ride-on mowers, which are equipped with pneumatic tires or rubber tracks. The driving surface is reinforced at the bottom, which significantly extends the life of the driving plates. Weight per ramp is 36 kg. The load capacity shown is per set!

This ramp is supplied as standard with connection A and a flat floor 1 , see detail photos. It is optionally possible to adjust this to your liking, please contact us for the possibilities or indicate your preference during the ordering process.

Specifications

Article arrangement: New
Version: aluminium 200 cm (pair)
Top: driving area of anti slip profile
Width (mm): 500
Loading capacity (kg): 7300
Type number: AVS-150
Max Height (mm): 370

Type: access ramp straight
Material: aluminium
Length (mm): 2000
Internal width (mm): 400
Weight (kg) 36
Batch (items): 2
EAN Code (Gtin) 8719424103991

Scan the QR code for more information



KRUIZINGA.NL®
Opslag- en transportmiddelen

KRUIZINGA.DE®
Lager- und Transportmittel

KRUIZINGA.FR®
Stockage et ressources de transport

KRUIZINGA.COM®
Material handling equipment